


Deep6™


Low Frequency Absorber



- Effective broadband control from 40 Hz and up
- Mounts to walls and corners
- Commercial and Residential Applications
- Low frequency control in a 2' x 4' footprint with a slim 6" profile
- Class A Fire Rated per ASTM E84

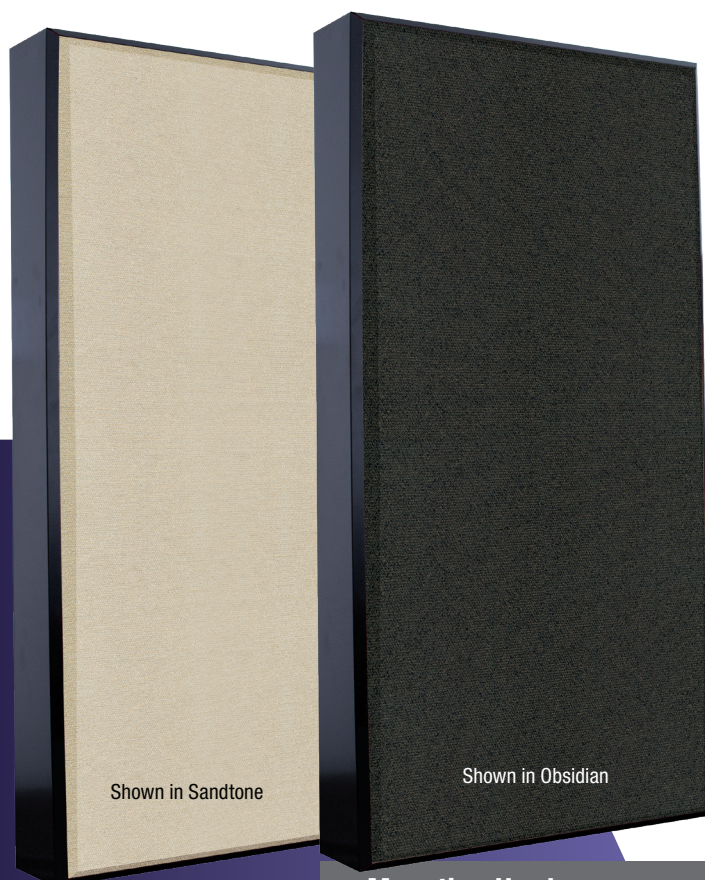

Mounting Hardware:




Standard Impaling Clips




Standard Impaling Clips Included

Corner Impaling Clips



Corner Impaling Clips (sold separately)

Offset Impaling Clips



Offset Impaling Clips (sold separately)

Deep6™ - Acoustical Testing Data (NRC): ASTM C423

Mounting:	Octave Band Center Frequency (Hz)											NRC:
	40 Hz*	50 Hz*	63 Hz*	80 Hz*	100 Hz	125 Hz	250 Hz	500 Hz	1 kHz	2 kHz	4 kHz	
A Mount (Flush with Surface)	0.27	0.21	0.03	0.30	0.90	0.99	0.92	1.00	1.04	1.06	0.99	1.00
F Mount (Offset 1" from surface)	0.14	0.16	0.06	0.25	0.85	1.24	1.01	1.18	1.19	1.16	1.07	1.15
J Mount (45° angle between two perpendicular surfaces.**)	0.73	0.61	0.30	1.59	1.78	2.3	1.60	1.35	1.30	1.25	1.20	1.35

*Extended Frequency Data: Testing facility certified down to 100 Hz, all frequency data below 100 Hz are unofficial and intended as a guide only.

**Apparent Absorption Coefficient / NRC: Non-Standard calculation of equivalent NRC rating and absorption coefficients from spaced absorbers. See official test report at www.auralex.com for more details.

All copyrightable materials are ©Copyright Auralex Acoustics, Inc. 1994-2020. Auralex, Total Sound Control and Real-World Acoustics are registered trademarks, and Deep6 is a trademark, of Auralex Acoustics, Inc. All rights reserved. Proudly designed and manufactured in the U.S.A.

All Deep6 Bass Traps have a dimensional tolerance of +/- 1/8" for thickness, length and width.

Real-World Acoustics®

1-800-959-3343 / 317-842-2600
9955 Westpoint Drive, Suite 101, Indianapolis IN USA 46256

1237-1014.Deep6 Spec Sheet.indd (12/26/2019 - 5:42 PM)